



FXNQ-MA

Concealed Floor Standing Unit





BRC1D52

BRC4C62

FXNQ20,25MA

- Ideal for installation beneath a window
- Long life filter fitted as standard
- Requires very little installation space, only 220mm depth
- The connecting port faces downward, eliminating the need to attach auxiliary piping

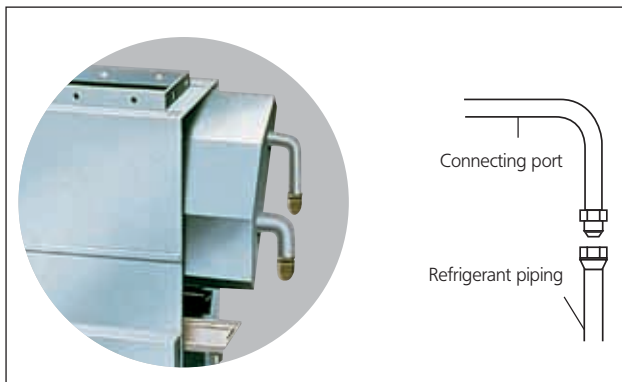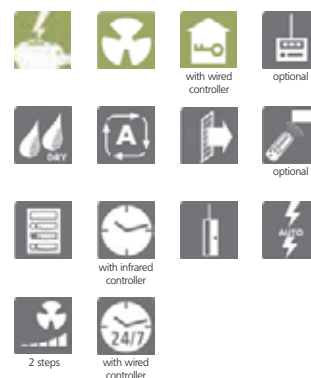

FXNQ-MAVE											
Indoor Units				20	25	32	40	50	63		
Capacity	Cooling	kw		2.20	2.80	3.60	4.50	5.60	7.10		
	Heating	kw		2.50	3.20	4.00	5.00	6.30	8.00		
Power input	Cooling	kw		0.049		0.090		0.110			
	Heating	kw		0.049		0.090		0.110			
Dimensions	(Height x Width x Depth)		mm	610x930x220		610x1,070x220		610x1,350x220			
Weight			kg	19		23		27			
Air Flow Rate	Cooling	High/Low	m ³ /min	7.00 / 6.00		8.00 / 6.00		14.00 / 11.00		16.00 / 12.00	
Sound Pressure	Cooling	High/Low	dBA	35.0 / 32.0				38.0 / 33.0		39.0 / 34.0	40.0 / 35.0
Refrigerant				R-410A							
Power Supply				1~/220-240V/50Hz							
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm		6.4 / 12.7 / 21				9.5 / 15.9 / 21			