



FXUQ-M/BEVQ-M


4-way blow ceiling suspended unit / Junction box



- Ideal for installation in new or existing buildings
- Group control with other VRV indoor units possible
- Cool/heat selection
- Prevention of cold draught at hot start, defrost and oil return in heating
- 5m maximum distance between FXUQ unit and junction box
- Air can be discharged in any of 4 directions
- Possibility to shut 1 or 2 flaps for easy installation in corners



- Auto-swing function ensures efficient air and temperature distribution
- Air flow distribution for ceiling heights up to 3.5 m
- Air can be discharged at 5 different angles between 0 and 60 degrees

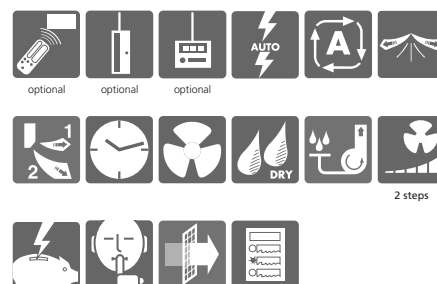

- Air filter, drain pan and heat exchanger fin are mildew proof

FXUQ-MV1

INDOOR UNIT			71	100	125
Cooling capacity	kW		8.0	11.2	14.0
Heating capacity	kW		9.0	12.5	14.0
Nominal input	cooling	W	180	289	289
	heating	W	160	269	269
Dimensions (HxWxD)	mm		165x895x895	230x895x895	
Weight	kg		25	31	
Air flow rate (H/L)	m ³ /min		19/14	29/21	32/23
Sound pressure level (H/L)(220V)	dB(A)		40/35	43/38	44/39
Sound power level	dB(A)		56	59	60
Refrigerant type			R-410A		
Power supply	VE		1 ~, 50Hz, 220-240V		
Infrared remote control	cooling		BRC7C529W		
	heating		BRC7C528W		
Wired remote control			BRC1D527		
Combination with junction box			BEVQ71MVE	BEVQ100MVE	BEVQ125MVE

BEVQ-MVE

JUNCTION BOX			71	100	125
Dimensions (HxWxD)	mm			100x350x225	
Weight	kg		3.0	3.0	3.5
Casing			galvanised steel plate		
Power supply	VE		1 ~, 50Hz, 220-240V		