



FXUQ-MAV1

4-Way Blow Ceiling Suspended Cassette




BRC1D52




BRC7C529/C528



FXUQ71MAV1



BEVQ-MA

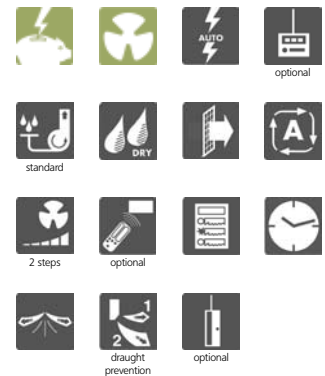

- Group control with other VRV indoor units possible
- 5m maximum distance between FXUQ unit and junction box
- Air can be discharged in any of 4 directions
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.5m without loss of capacity.
- Air can be discharged at 5 different angles between 0 and 60 degrees
- Air filter, drain pan and heat exchanger fin are mildew proof and anti-bacterial treated.

FXUQ-MAV1

Indoor Units				FXUQ71MAV1	FXUQ100MAV1	FXUQ125MAV1
Capacity	Cooling		kw	8.0	11.2	14.0
	Heating		kw	9.0	12.5	14.0
Power input	Cooling		kw	0.180	0.289	
	Heating		kw	0.160	0.269	
Dimensions	(Height x Width x Depth)		mm	165x895x895	230x895x895	
Weight			kg	25	31	
Air Flow Rate	Cooling	High/Low	m³/min	19.00 / 14.00	29.00 / 21.00	32.00 / 23.00
	Heating	High/Low	m³/min	19.00 / 14.00	29.00 / 21.00	32.00 / 23.00
Sound power (nominal)	Cooling		dBA	56.0	59.0	60.0
Sound Pressure	Cooling	High/Low	dBA	40.0 / 35.0	43.0 / 38.0	44.0 / 39.0
	Heating	High/Low	dBA	40.0 / 35.0	43.0 / 38.0	44.0 / 39.0
Refrigerant				R-410A		
Power Supply				1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain		mm	9.5 / 15.9 / I.D. 20/O.D. 26		
Combination with junction box				BEVQ71M	BEVQ100M	BEVQ125M

BEVQ-MA

				71	100	125
Dimensions	HxWxD		mm	100x350x225		
Weight			kg	3.0	3.0	3.5
Casing				Galvanised steel plate		
Power supply			VE	1~, 50Hz, 220-240V		