



# 4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space


- › Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Recessed installation possible in small ceiling voids (88 mm)
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › 5 different discharge angles between 0 and 60° can be programmed via the remote control

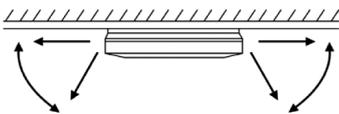

- › Standard drain pump with 500mm lift increases flexibility and installation speed

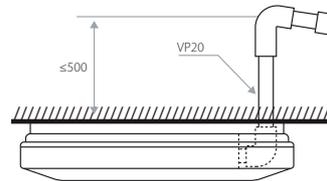

Indoor unit			FXUQ	71A	100A
Cooling capacity	Nom.		kW	8.0	11.2
Heating capacity	Nom.		kW	9.0	12.5
Power input - 50Hz	Cooling	Nom.	kW	0.090	0.200
	Heating	Nom.	kW	0.073	0.179
Dimensions	Unit	Height	mm	198	
		Width	mm	950	
		Depth	mm	950	
Weight	Unit		kg	26	27
Casing	Colour			Fresh White	
	Material			Resin	
Fan-Air flow rate - 50Hz	Cooling	High/Nom./Low	m <sup>3</sup> /min	22.5/19.5/16.0	31.0/26.0/21.0
	Heating	High/Nom./Low	m <sup>3</sup> /min	22.5/19.5/16.0	31.0/26.0/21.0
Air filter	Type			Resin net with mold resistance	
Sound pressure level	Cooling	High/Nom./Low	dBA	40.0/38.0/36.0	47.0/44.0/40.0
	Heating	High/Nom./Low	dBA	40.0/38.0/36.0	47.0/44.0/40.0
Refrigerant	Type			R-410A	
	GWP			2,087.5	
Piping connections	Liquid	OD	mm	9.52	
	Gas	OD	mm	15.9	
	Drain			I.D. 20/O.D. 26	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220-230	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	
Control systems	Infrared remote control			BRC7C58	
	Wired remote control			BRC1E52A/B / BRC1D52	
	Simplified wired remote control for hotel applications			BRC2E52C (heat recovery type) / BRC3E52C (heat pump type)	


(1) Contains fluorinated greenhouse gases

**FXUQ-A**

**Note:**

1. Location for manufacture's label: On the control box lid inside suction grille.
2. This is where the signal of infrared remote controller is received. Refer to the outside drawing of infrared remote controller in detail.
3. When closing the discharge grill (2 or 3 way discharge), direction of pipe connection will be limited, please refer to installation manual.
4. Please do not place the thing been damp and troubled under an indoor unit. When the case where humidity is 80% or more, and the drain outlet are choked up and the air filter are dirty, dew may fall.

(Unit: mm)

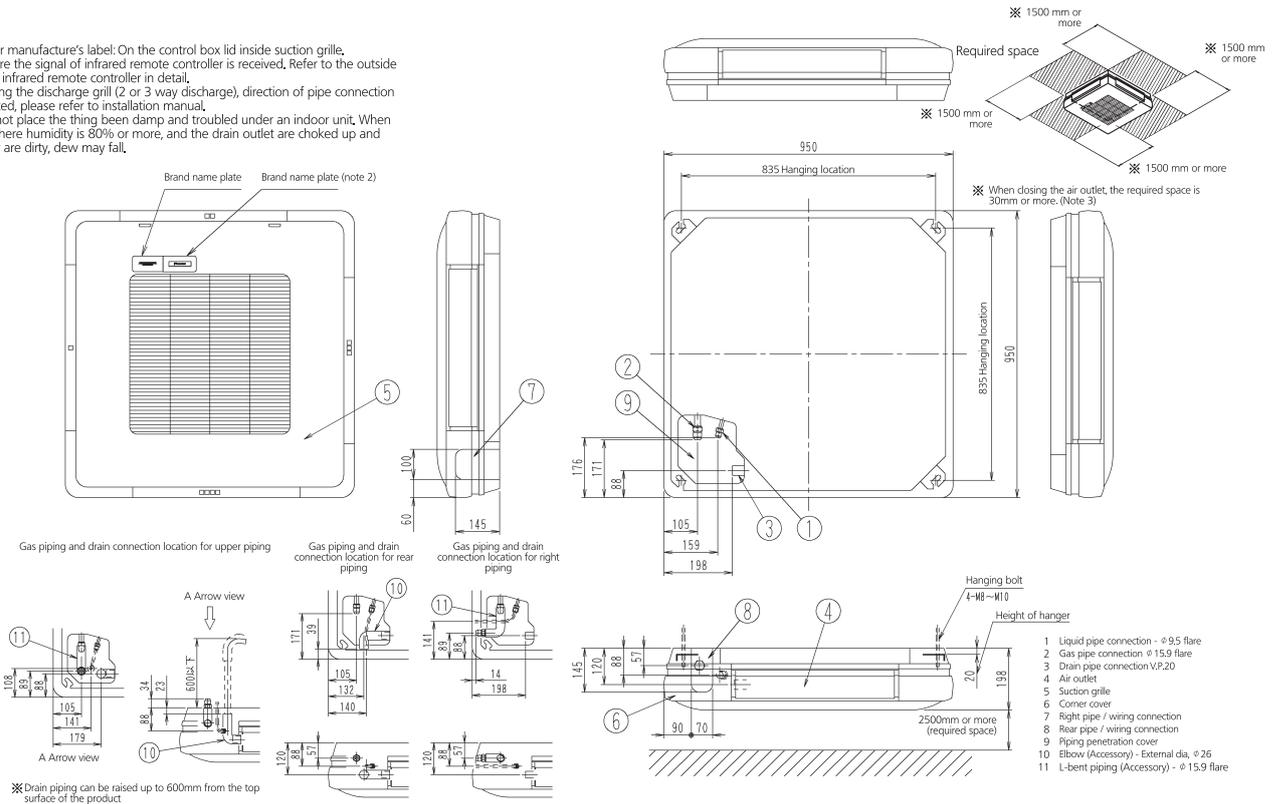

3D080135