



# FXZQ-M8V1B

## 4-Way Blow Ceiling Mounted Cassette (600mm x 600mm)



BRC1D52



BRC7E531/E530



FXZQ-M8V1B

- New and extremely compact casing (575mm in width and depth) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Modern style decoration panel in white (RAL9010)
- Whisper quiet operation: down to 25 dBA sound pressure level
- Excellent low draught characteristics
- Vertical auto-swing function moves the discharge flaps up and down for efficient air distribution throughout the room
- Since the flaps can move to a 0 degree position, virtually no draught can be experienced





- 5 different air flow patterns:
- Any one of 5 air flow patterns can be freely selected between zero and 40 degrees and will then be maintained during the operational cycle of the air conditioner,
- Air can be discharged in any of 4 directions
- Possibility to shut 1 or 2 flaps for easy installation in corners


2-way blow



4-way blow



3-way blow

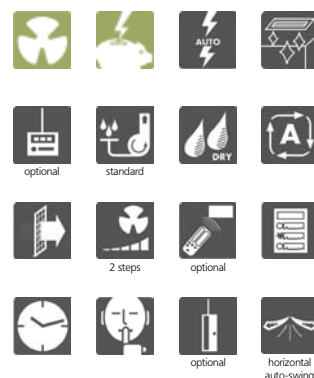

### FXZQ-M8V1B

| Indoor Units          |                          |          | FXZQ20M8V1B      | FXZQ25M8V1B | FXZQ32M8V1B | FXZQ40M8V1B  | FXZQ50M8V1B   |
|-----------------------|--------------------------|----------|------------------|-------------|-------------|--------------|---------------|
| Capacity              | Cooling                  | kw       | 2.20             | 2.80        | 3.60        | 4.50         | 5.60          |
|                       | Heating                  | kw       | 2.50             | 3.20        | 4.00        | 5.00         | 6.30          |
| Power input           | Cooling                  | kw       | 0.073            |             | 0.076       | 0.089        | 0.115         |
|                       | Heating                  | kw       | 0.064            |             | 0.068       | 0.080        | 0.107         |
| Dimensions            | (Height x Width x Depth) |          | 286x575x575      |             |             |              |               |
| Weight                |                          |          | 18               |             |             |              |               |
| Air Flow Rate         | Cooling                  | High/Low | 9.00 / 7.00      |             | 9.50 / 7.50 | 11.00 / 8.00 | 14.00 / 10.00 |
| Sound power (nominal) | Cooling                  |          | 47.0             |             | 49.0        | 53.0         | 58.0          |
| Sound Pressure        | Cooling                  | High/Low | 30.0 / 25.0      |             | 32.0 / 26.0 | 36.0 / 28.0  | 41.0 / 33.0   |
| Refrigerant           |                          |          | R-410A           |             |             |              |               |
| Power Supply          |                          |          | 1~/220-240V/50Hz |             |             |              |               |
| Piping connections    | Liquid (OD)/Gas/Drain    | mm       | 6.4 / 12.7 / 26  |             |             |              |               |
| Decoration Panel      | Model                    |          | BYFQ60B7W1       |             |             |              |               |
|                       | Colour                   |          | White (Ral 9010) |             |             |              |               |
|                       | HeightxWidthxDepth       | mm       | 55x700x700       |             |             |              |               |
| Weight                |                          |          | 2.7              |             |             |              |               |