

# FXZQ-M9

4-way blow ceiling mounted cassette  
(600mmx600mm)



BRC1E51



BRC7E530




FXZQ-M9

- Extremely compact casing (575mm in width and depth) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices
- Modern style decoration panel in white (RAL9010)
- Low noise operation: down to 25 dBA sound pressure level
- Excellent low draught characteristics
- Vertical auto-swing function moves the discharge flaps up and down for efficient air distribution throughout the room
- Since the flaps can move to a 0 degree position, virtually no draught can be experienced

- Drain up pump with 750mm lift fitted as standard
- Allows multi tenant applications (option PCB required)
- 5 different air flow patterns: Any one of 5 air flow patterns can be freely selected between zero and 40 degrees and will then be maintained during the operational cycle of the air conditioner
- Air can be discharged in any of 4 directions
- Possibility to shut 1 or 2 flaps for easy installation in corners
- **BRC1E51A – new wired controller:** allows easy navigation through menu items, via a personalised display and minimal number of buttons. Provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible



### Examples of air flow patterns possible

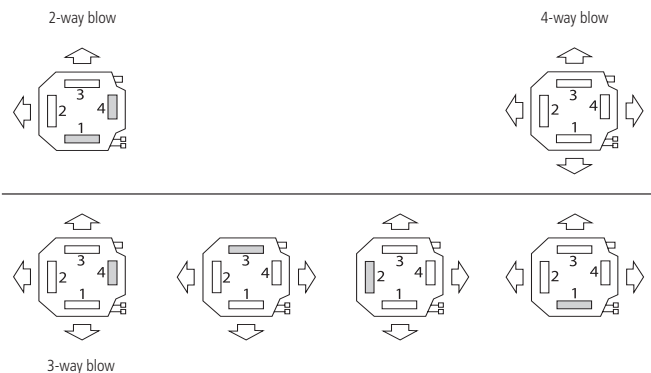

FXZQ-M9			15	20	25	32	40	50
<b>Indoor units</b>								
Capacity	Cooling	kW	1.50	2.20	2.80	3.60	4.50	5.60
	Heating	kW	1.70	2.50	3.20	4.00	5.00	6.30
Power input	Cooling	kW	-	0.073		0.076	0.089	0.115
	Heating	kW	-	0.064		0.068	0.080	0.107
Dimensions	(Height x Width x Depth)		286x575x575			286x575x575		
Weight			18			18		
Air flow rate	Cooling	High/Low	8.1/7		9.00 / 7.00		9.50 / 7.50	
Sound power (nominal)	Cooling		-		47.0		49.0	
Sound pressure	Cooling	High/Low	29/25		30.0 / 25.0		32.0 / 26.0	
Refrigerant			R-410A			R-410A		
Power supply			1~/220-240V/50Hz			1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 36			6.4 / 12.7 / 36		
Decoration panel	Model		BYFQ60B7W1			BYFQ60B7W1		
	Colour		White (Ral 9010)			White (Ral 9010)		
	HeightxWidthxDepth	mm	55x700x700			55x700x700		
	Weight	kg	2.7			2.7		

\* Note: grey cells contain preliminary data