


FXZQ-A (white panel)



FXZQ-A (silver and white panel)





BRC1E52A/B BRC7F530W/S



presence sensor

floor sensor

- › Unique design in the market: integrates fully flat into the ceiling and fits flush into architectural ceiling modules
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › The presence sensor (optional) adjusts the set point with standard 1°C if no one is detected in the room, it is possible to adjust the set point with 2, 3 or 4°C (optional). It also automatically directs air flow away from any person to avoid draught.
- › The floor sensor (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- › Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- › Low energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- › Fresh air intake for healthy living
- › Standard drain pump with 850mm lift

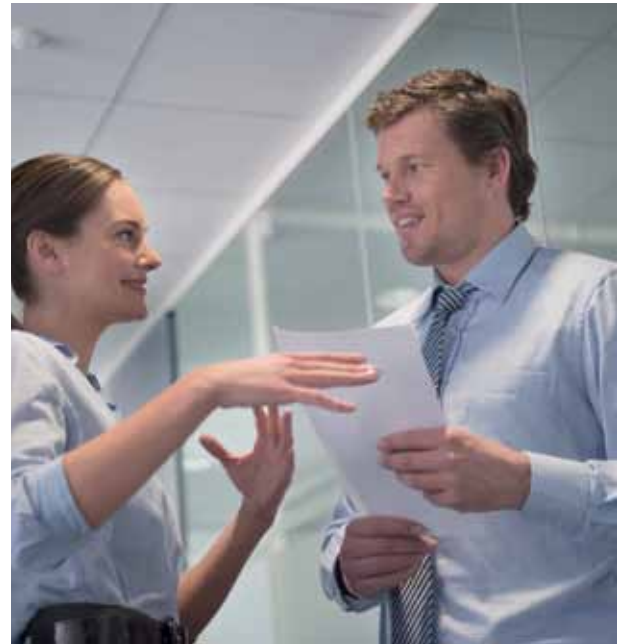

INDOOR UNIT				FXZQ15A	FXZQ20A	FXZQ25A	FXZQ32A	FXZQ40A	FXZQ50A
Cooling capacity	Nom.	kW		1.7	2.2	2.8	3.6	4.5	5.6
Heating capacity	Nom.	kW		1.9	2.5	3.2	4.0	5.0	6.3
Power input - 50Hz	Cooling	Nom.	kW		0.043		0.045	0.059	0.092
	Heating	Nom.	kW		0.036		0.038	0.053	0.086
Dimensions	Unit	HeightxWidthxDepth	mm	260x575x575					
Weight	Unit		kg	15.5				16.5	18.5
Decoration panel	Model			BYFQ60CW / BYCQ60CS / BYFQ60B2					
	Colour			White (N9.5) / White (N9.5) + Silver / White (RAL9010)					
	Dimensions	HeightxWidthxDepth	mm	46x620x620 / 46x620x620 / 55x700x700					
	Weight		kg	2.8/2.8/2.7					
Fan-Air flow rate - 50Hz	Cooling	High/Nom./Low	m ³ /min	8.5/7/6.5	8.7/7.5/6.5	9/8/6.5	10/8.5/7	11.5/9.5/8	14.5/12.5/10
	Heating	High/Nom./Low	m ³ /min	8.5/7/6.5	8.7/7.5/6.5	9/8/6.5	10/8.5/7	11.5/9.5/8	14.5/12.5/10
Sound power level	Cooling	High/Nom.	dBA	49/-		50/-	51/-	54/-	60/-
Sound pressure level	Cooling	High/Nom./Low	dBA	31.5/28/25.5	32/29.5/25.5	33/30/25.5	33.5/30/26	37/32/28	43/40/33
	Heating	High/Nom./Low	dBA	31.5/28/25.5	32/29.5/25.5	33/30/25.5	33.5/30/26	37/32/28	43/40/33
Refrigerant	Type			R-410A					
Piping connections	Liquid/OD/Gas/OD/Drain	mm		6.35/12.7/VP20 (I.D. 20/O.D. 26)					
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/220-240					
Current - 50Hz	Maximum fuse amps (MFA)	A		16					

(1) Dimensions do not include control box