


Individual branch selector for VRV IV heat recovery

- › Unique range of single and multi BS boxes for flexible and fast design
- › Compact & light to install
- › Ideal for remote rooms as no drain piping is needed
- › Allows integration of server rooms into the heat recovery solution thanks to technical cooling function
- › Connect up to 250 class unit (28kW)
- › Faster installation thanks to open connection
- › Allows multi tenant applications
- › Connectable to REYQ-T, RQCEQ-P3 and RWEYQ-T8 VRV IV heat recovery units

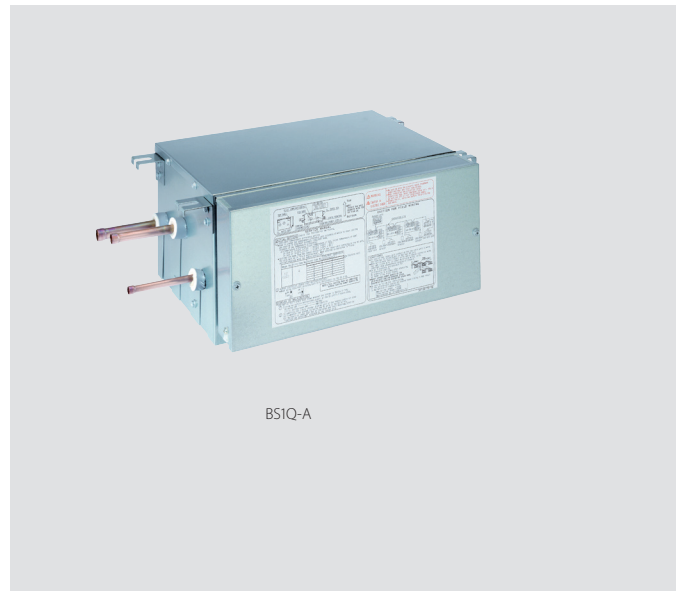

Indoor unit		BS		1Q10A	1Q16A	1Q25A	
Power input	Cooling	Nom.	kW		0.005		
	Heating	Nom.	kW		0.005		
Maximum number of connectable indoor units				6		8	
Maximum capacity index of connectable indoor units				15 < x ≤ 100	100 < x ≤ 160	160 < x ≤ 250	
Dimensions	Unit	Height	Width	Depth	mm		
Weight	Unit					12	15
Casing	Material						Galvanised steel plate
Piping connections	Outdoor unit	Liquid	OD	mm	9.5		
		Gas	OD	mm	15.9	22.2	
		Discharge gas	OD	mm	12.7	19.1	
	Indoor unit	Liquid	OD	mm	9.5		
		Gas	OD	mm	15.9	22.2	
		Foamed polyurethane Flame-resistant needle felt					
Sound absorbing thermal insulation							
Power supply	Phase		1~				
	Frequency		Hz				
	Voltage		V				
Total circuit	Maximum fuse amps (MFA)		A				
				15			