



FFKQ-MA

Ceiling Mounted Corner Cassette




BRC1D52 BRC4C61




FFKQ63MA

- Slim design 215mm height
- Auto-swing function ensures efficient air and temperature distribution,
- Choice between 3 auto-swing positions for maximum comfort: standard, draught prevention, ceiling soiling prevention
- Optimum air flow conditions are created by either downward air discharge or frontal air discharge (via optional grille) or a combination of both


- Leaves maximum floor and wall space for furniture, decorations and fittings
- Drain up pump with 500mm lift fitted as standard

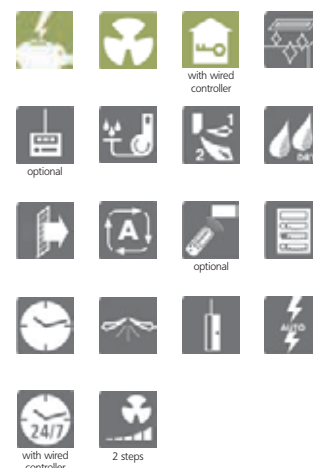


Downward discharge



Frontal discharge

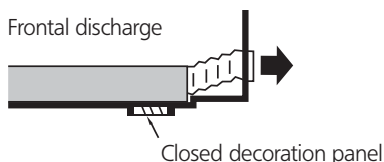

Combination



| FFKQ-MAVE | | | | FFKQ25MAVE | FFKQ32MAVE | FFKQ40MAVE | FFKQ63MAVE |
|---------------------|--------------------------|----------|--------|------------------|------------|---------------|-----------------|
| Indoor Units | | | | | | | |
| Capacity | Cooling | | kW | 2.80 | 3.60 | 4.50 | 7.10 |
| | Heating | | kW | 3.20 | 4.00 | 5.00 | 8.00 |
| Power input | Cooling | | kW | 0.066 | | 0.076 | 0.105 |
| | Heating | | kW | 0.046 | | 0.056 | 0.085 |
| Dimensions | (Height x Width x Depth) | | mm | 215x1,110x710 | | | 215x1,310x710 |
| Weight | | | kg | 31 | | | 34 |
| Air Flow Rate | Cooling | High/Low | m³/min | 11.00 / 9.00 | | 13.00 / 10.00 | 18.00 / 15.00 |
| Sound Pressure | Cooling | High/Low | dB(A) | 38.0 / 33.0 | | 40.0 / 34.0 | 42.0 / 37.0 |
| Refrigerant | | | | R-410A | | | |
| Power Supply | | | | 1~/220-240V/50Hz | | | |
| Piping connections | Liquid (OD)/Gas/Drain | | mm | 6.4 / 12.7 / 32 | | | 9.5 / 15.9 / 32 |
| Decoration Panel | Model | | | BYK45FJW1 | | | BYK71FJW1 |
| | Colour | | | White | | | |
| | HeightxWidthxDPTH | | mm | 70x1240x800 | | | 70x1440x800 |
| | Weight | | kg | 8.5 | | | 9.5 |