



FXSQ-M8


Concealed ceiling unit

new

FXSQ20,25,32M8



- Blends unobtrusively with any interior décor
- Leaves maximum floor and wall space for furniture decoration and fittings
- Drain pump fitted as standard
- Long life filter fitted as standard
- Air suction direction can be altered from rear to bottom suction
- The quiet operation of this model is ideal for exclusive stores and offices
- High external pressure facilitates unit use with flexible ducts of varying lengths

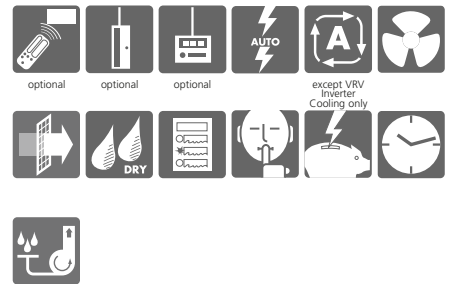

FXSQ-M8

INDOOR UNIT		20	25	32	40	50	63	80	100	125	
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	
Nominal input	cooling	110	110	114	127	143	189	234	242	321	
	heating	90	90	94	107	123	169	214	222	301	
Dimensions (HxWxD)	mm	300x550x800			300x700x800		300x1,000x800		300x1,400x800		
Weight	kg	30	30	30	30	31	41	51	51	52	
Air flow rate (H/L)	m ³ /min	9/6.5	9/6.5	9.5/7	11.5/9	15/11	21/15.5	27/20	28/20.5	38/28	
Sound pressure level (H/L)	dB(A)	32/28	32/28	33/28	33/29	35/31	35/30	37/31	38/33	40/35	
Sound power level	dB(A)	50	50	51	56	58	56	55	56	65	
Refrigerant type		R-410A									
Power supply	V1	1 ~, 50Hz, 230V									
Piping connections	liquid/gas	mm				mm		mm			
Infrared remote control	cooling	ø6.4/ø12.7									
	heating	ø9.5/ø15.9									
Wired remote control		BRC4C64 BRC4C62 BRC1D52									
DECORATION PANEL		BYBS32DJW1			BYBS45D		BYBS71D		BYBS125D		
Dimensions (HxWxD)	mm	55x650x500			55x800x500		55x1000x500		55x1500x500		
Weight	kg	3			3.5		4.5		6.5		