



# FXXQ-MAVE

## Ceiling Mounted Corner Cassette




BRC1D52 BRC4C63/C61





FXXQ63MAVE

- Slim design 215mm height
- Auto-swing function ensures efficient air and temperature distribution,
- Choice between 3 auto-swing positions for maximum comfort: standard, draught prevention, ceiling soiling prevention
- Optimum air flow conditions are created by either downward air discharge or frontal air discharge (via optional grille) or a combination of both


- Leaves maximum floor and wall space for furniture, decorations and fittings

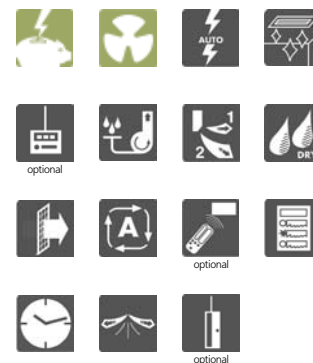

Downward discharge



Closed decoration panel



### FXXQ-MAVE

| Indoor Units       |                          |          |                     | FXXQ25MAVE       | FXXQ32MAVE | FXXQ40MAVE    | FXXQ63MAVE      |
|--------------------|--------------------------|----------|---------------------|------------------|------------|---------------|-----------------|
| Capacity           | Cooling                  |          | kw                  | 2.80             | 3.60       | 4.50          | 7.10            |
|                    | Heating                  |          | kw                  | 3.20             | 4.00       | 5.00          | 8.00            |
| Power input        | Cooling                  |          | kw                  | 0.066            |            | 0.076         | 0.105           |
|                    | Heating                  |          | kw                  | 0.046            |            | 0.056         | 0.085           |
| Dimensions         | (Height x Width x Depth) |          | mm                  | 215x1,110x710    |            |               | 215x1,310x710   |
| Weight             |                          |          | kg                  | 31               |            |               | 34              |
| Air Flow Rate      | Cooling                  | High/Low | m <sup>3</sup> /min | 11.00 / 9.00     |            | 13.00 / 10.00 | 18.00 / 15.00   |
| Sound Pressure     | Cooling                  | High/Low | dB(A)               | 38.0 / 33.0      |            | 40.0 / 34.0   | 42.0 / 37.0     |
| Refrigerant        |                          |          |                     | R-410A           |            |               |                 |
| Power Supply       |                          |          |                     | 1~/220-240V/50Hz |            |               |                 |
| Piping connections | Liquid (OD)/Gas/Drain    |          | mm                  | 6.4 / 12.7 / 32  |            |               | 9.5 / 15.9 / 32 |
| Decoration Panel   | Model                    |          |                     | BYK45FJW1        |            |               | BYK71FJW1       |
|                    | Colour                   |          |                     | White            |            |               |                 |
|                    | HeightxWidthxDPTH        |          | mm                  | 70x1240x800      |            |               | 70x1440x800     |
|                    | Weight                   |          | kg                  | 8.5              |            |               | 9.5             |