



# FXMQ-MA

## Concealed Ceiling Unit (Large)




BRC1D52


BRC4C62

FXMQ-MA

- Range of models 200-250 class
- Up to 270 Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Optional drain pump (accessory): housing the drain pump inside the unit has reduced the required installation space
- Optional suction air filter plenums and filters

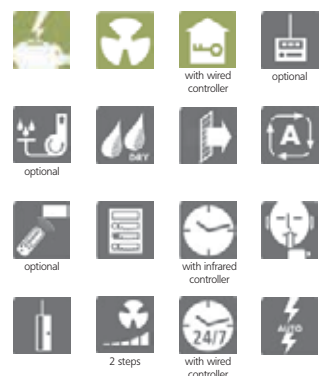

### Optional drain pump accessory

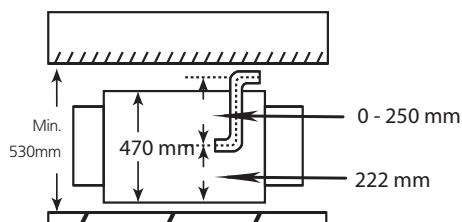

FXMQ-MAVE				
Indoor Units			200	250
Capacity	Cooling	kw	22.40	28.00
	Heating	kw	25.00	31.50
Power input (Nominal)	Cooling	kw	1.294	1.465
	Heating	kw	1.294	1.465
Dimensions	(Height x Width x Depth)	mm	470x1,380x1100	
Weight		kg	137	
Air Flow Rate	Cooling	High/Low	m <sup>3</sup> /min	58.00 / 50.00
External Static Pressure	High / Standard	Pa	221 / 132	270 / 147
Sound Pressure	Cooling	High/Low	dBA	48.0 / 45.0
Refrigerant			R-410A	
Power Supply			1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	9.5 / 19.1 / PS1B	9.5 / 22.2 / PS1B