



FXMQ-MA

Concealed ceiling unit (large)



BRC1E51




BRC4C62



FXMQ-MA

- Range of models 200-250 class
- Up to 270 Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Optional drain pump (accessory): housing the drain pump inside the unit has reduced the required installation space
- Optional suction air filter plenums and filters
- **BRC1E51A – new wired controller:** allows easy navigation through menu items, via a personalised display and minimal number of buttons. Provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible

Optional drain pump accessory

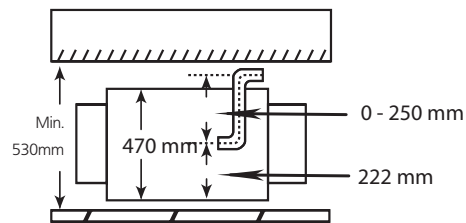

FXMQ-MA				200	250
Indoor units					
Capacity	Cooling	kW	22.40	28.00	
	Heating	kW	25.00	31.50	
Power input (nominal)	Cooling	kW	1.294	1.465	
	Heating	kW	1.294	1.465	
Dimensions	(Height x Width x Depth)		470x1,380x1100		
Weight			137		
Air flow rate	Cooling	High/Low	m ³ /min	58.00 / 50.00	72.00 / 62.00
External static pressure	High / Standard		Pa	221 / 132	270 / 147
Sound pressure	Cooling	High/Low	dBA	48.0 / 45.0	
Refrigerant			R-410A		
Power supply			1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	9.5 / 19.1 / PS1B	9.5 / 22.2 / PS1B	